




## Volvo FH 2013- (Globetotter / Globetotter XL)

Art. 868610; 868611


Laternakandur | Lamp holder | Scheinwerferbügel



- |                                                 |    |
|-------------------------------------------------|----|
| 1. Laternakandur / lampholder /                 | 1  |
| 2. Vinkel / angled plate /                      | 2  |
| 3. Vinkel / angled plate /                      | 2  |
| 4. Kompensaator / rubber plate /                | 4  |
| 5. Magnetkinnitus / magnetic support M8 x 15 mm | 2  |
| 6. Polt / bolt / M8x25 mm                       | 10 |
| 7. Mutter / nut / M8 DIN 934                    | 2  |
| 8. Mutter / nut / M8 DIN 985                    | 6  |
| 9. Seib / washer / 8,4x24x2 mm                  | 18 |
| 10. Vedruseib / spring washer / A8              | 6  |
| 11. Laternaklamber / lamp clamp /               | 5  |

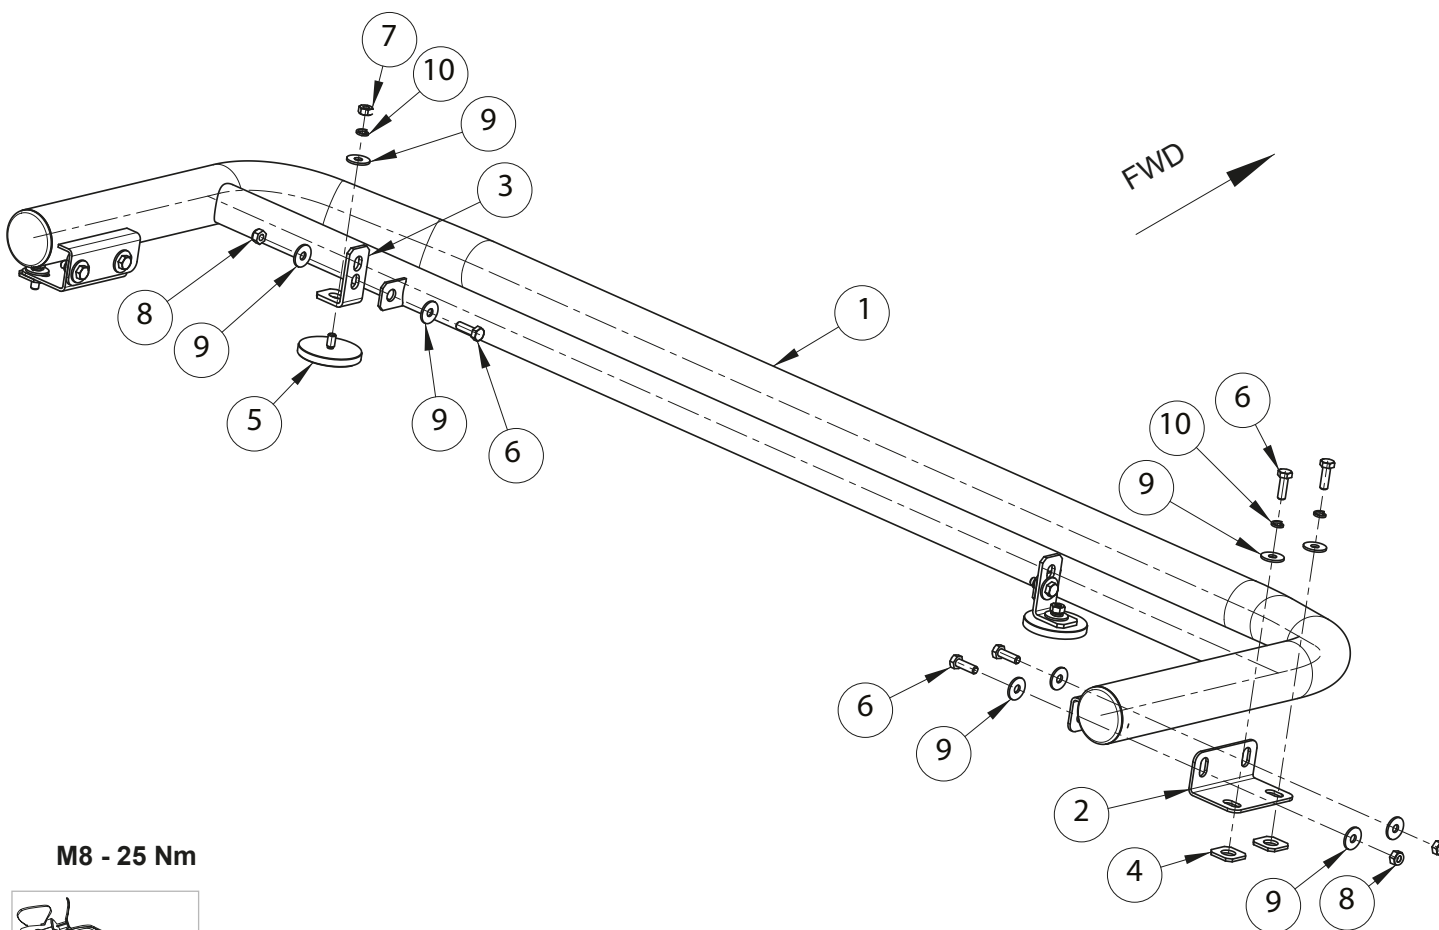

M8 - 25 Nm



Kaal / Weight / Macca / Gewicht: 10 kg


Paigaldusaeg ilma elektritöödeta / Time of mounting w/o wiring works / Einbauzeit ohne elektrische arbeit: 40 min

Vajalikud tööriistad / Required Tools / Benötigte Werkzeuge







Pilt 1 / Pic. 1 / Рис. 1

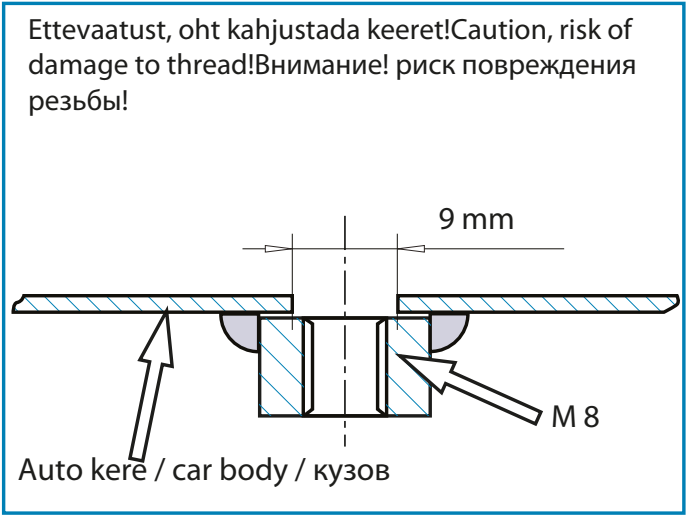


Pilt 2 / Pic. 2 / Рис. 2

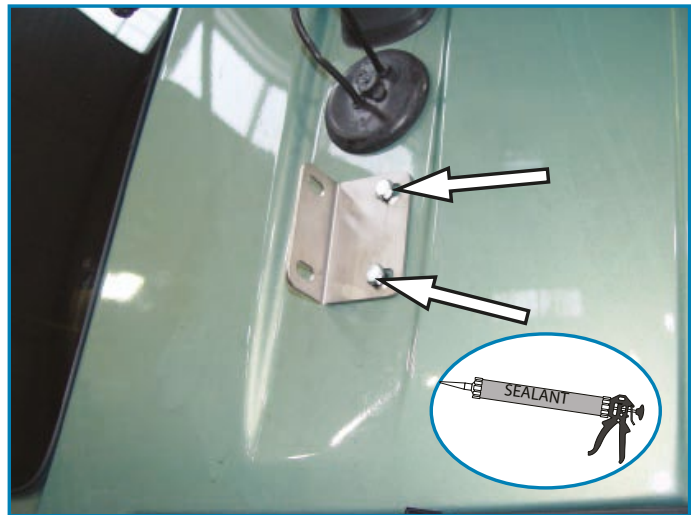


Pilt 3 / Pic. 3 / Рис. 3

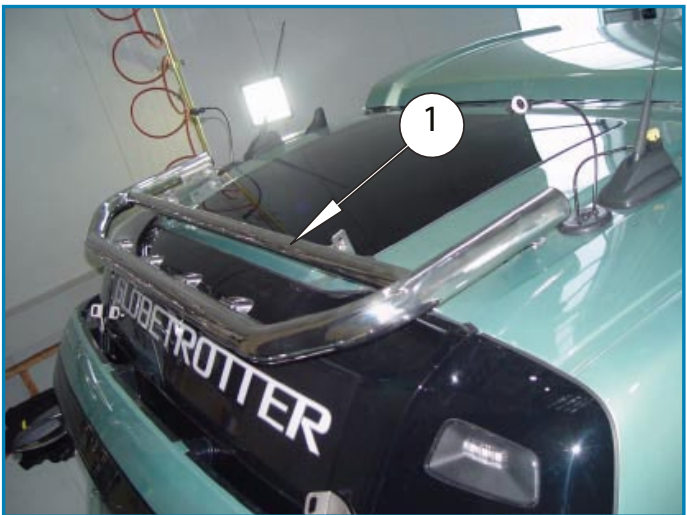

Pilt 4 / Pic. 4 / Рис. 4

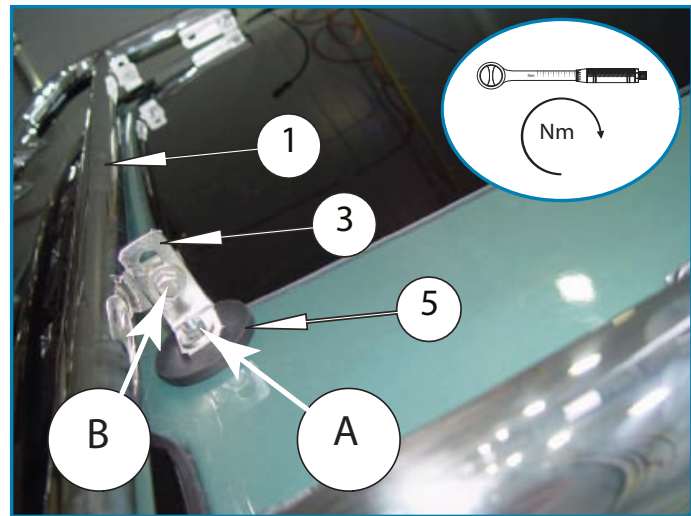

Pilt 5 / Pic. 5 / Рис. 5

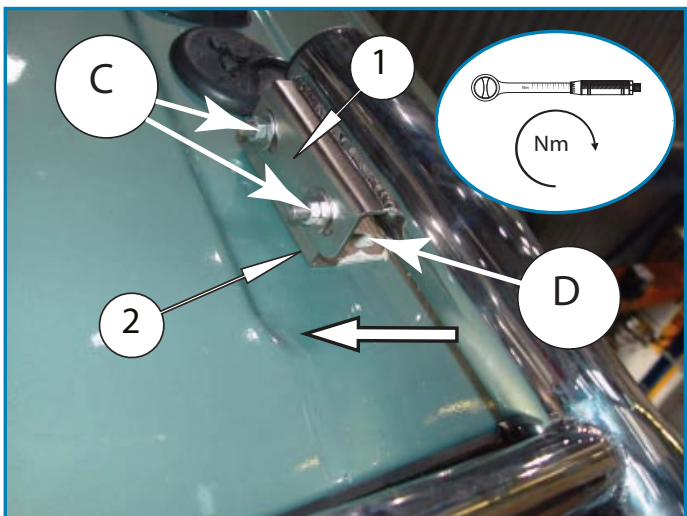

Pilt 6 / Pic. 6 / Рис. 6



11

10

**Elektriühendused teostada kvalifitseeritud autoelektriku poolt**

Installation of the lights can be carried out by qualified electrician only

Монтаж огней может быть выполнено только квалифицированным электриком

Die Installation der Lichter können durchgeführt werden durch Elektrofachkraft

Switching pattern of the lights of the holder with OE connectors for XC117 and XC172 of factory prewiring "SPOT-R" / "SPOT-RF" and "BEACON-P"

Tube mounted Led marker lights "C" (if presented) are connected inside the tube and connected with potential position lights of the extra spot lights.

Juhtmesari võimaldab ühendada:


- B harudele kokku tarbimist kuni 15A
- A harudele kokku tarbimist kuni 15A

B haru võimaldab kas eraldi lülitust või kogu-koormuse jaotamist kaablisoonte vahel (vajalik juhtmete ümbertõstmise auto pistikus)


Wiring allows to connect:

- B looms with gross load of 15A
- A looms with gross load of 15A


B loom connected either as separate "switch-on" or used to distribute the load between the wires (repositioning wires in the truck can connector)

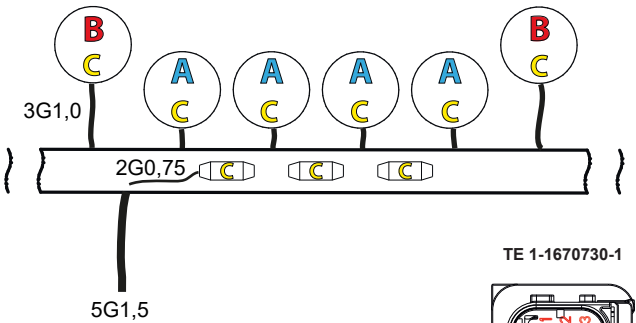

TE 1-1670730-1



Volvo 60114164



| switch ON position | cord ID number references |         |         |        |                    |                   |
|--------------------|---------------------------|---------|---------|--------|--------------------|-------------------|
|                    | 5G1,5                     | 3G1,0 A | 3G1,0 B | 2G0,75 | to XC117 1670730-1 | to XC172 60114164 |
| yellow +           | 1                         | 1       | 1       | 2      | (1) 2              |                   |
| ground -           | Gr/y                      | Gr/y    |         | 1      | 3                  |                   |
| red +              | 2                         |         | 2       |        |                    | 1                 |
| blue +             | 3                         | 2       |         |        | (2) 1              |                   |
| ground B -         | 4                         |         | Gr/y    |        |                    | 2                 |