


Hitachi ZX135US 21-

Mounting instructions
Art. 88600170, 88600171
Lamp holder for roof

English




WWW.METEC.EE

Scan the QR code
for translated
instructions or visit
metec.ee/instructions



Weight: 15,2 kg
Time of mounting w/o wiring: 60 min


Required tools:



A2 / A4

M6 - 7 Nm
M8 - 17 Nm
M12 - 57 Nm
M16 - 140 Nm

Variant 1

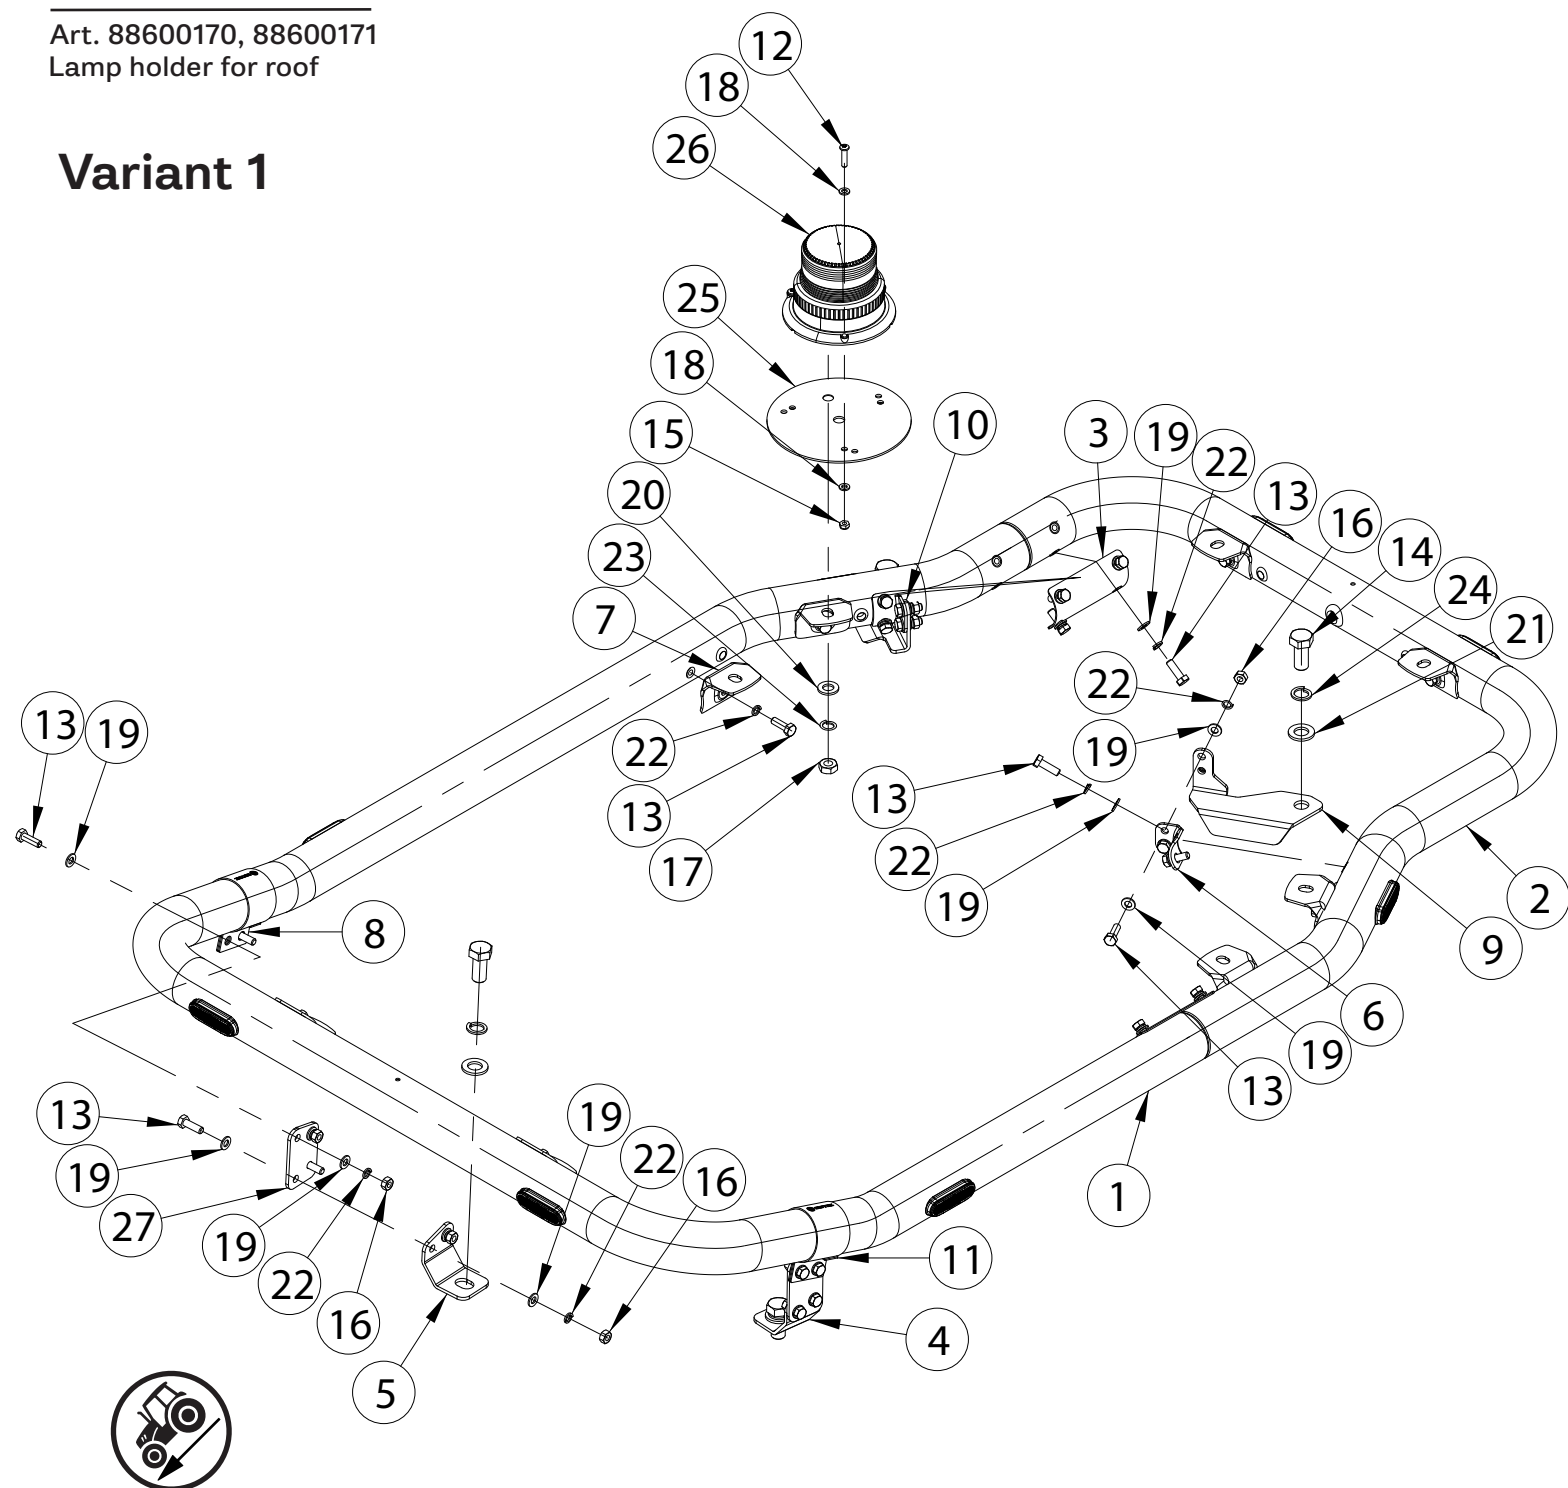

Pos	Description	QTY	Pos	Description	QTY	Pos	Description	QTY
1.	Front tube	1	11.	Brace-it installation tool	2	21.	Flat Washer 17x30x3	4
2.	Rear tube	1	12.	Bolt M6x25 DIN7380-A2	3	22.	Spring washer A8	32
3.	Tube bracket	2	13.	Bolt M8x25 DIN933-A2	32	23.	Spring washer A12	1
4.	Bracket	1	14.	Bolt M16x35 DIN933-A2	4	24.	Spring washer A16	4
5.	Bracket	1	15.	Nut M6 DIN985-A2	3	25.	Disk plate	1
6.	Bolt bracket	2	16.	Nut M8 DIN934-A2	12	26.	LED flashing light	1
7.	Lamp fixing bracket	8	17.	Nut M12 DIN934-A2	1	27.	Spacer plate	2
8.	Clamp	2	18.	Flat Washer 6,4x12x1,6	6			
9.	Bracket	1	19.	Flat Washer 8,4x16x1,6	36			
10.	Bracket	1	20.	Flat Washer 13x24x2,5	1			








NB!



To prevent cold welding, use cold weld grease or engine oil








Installation of the lights must be carried out by a qualified electrician only

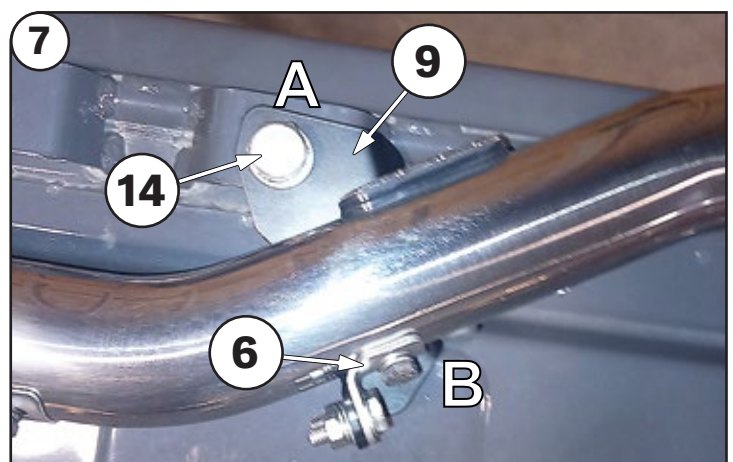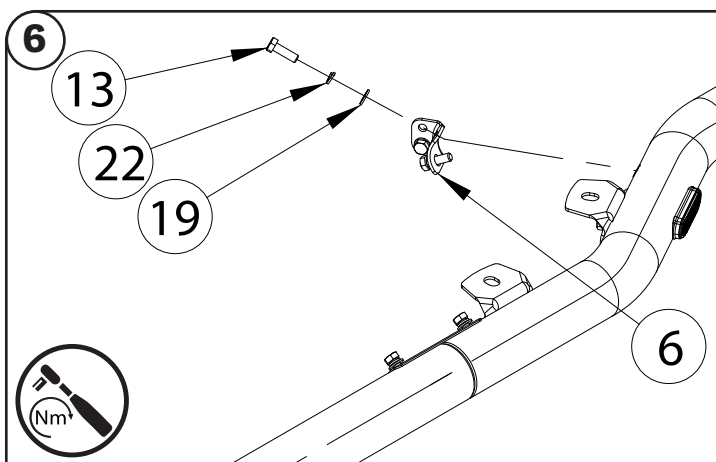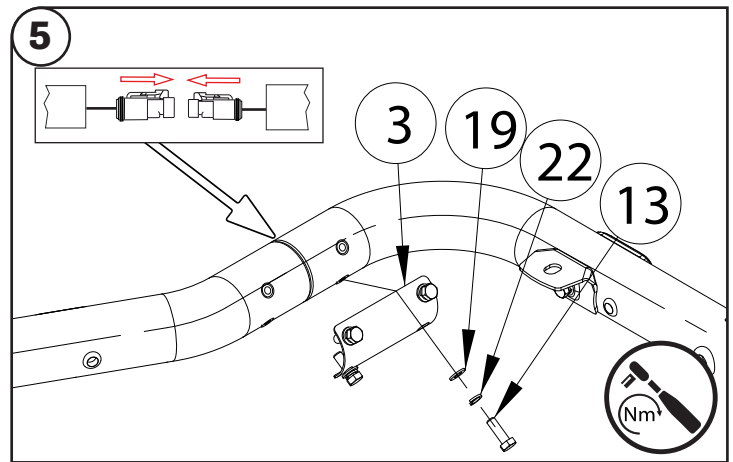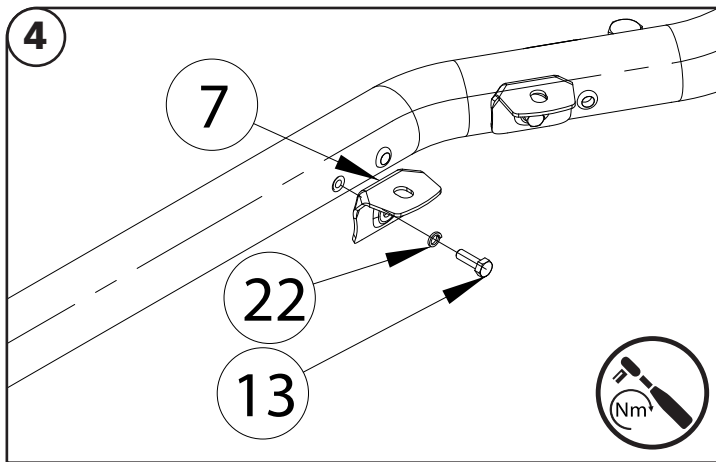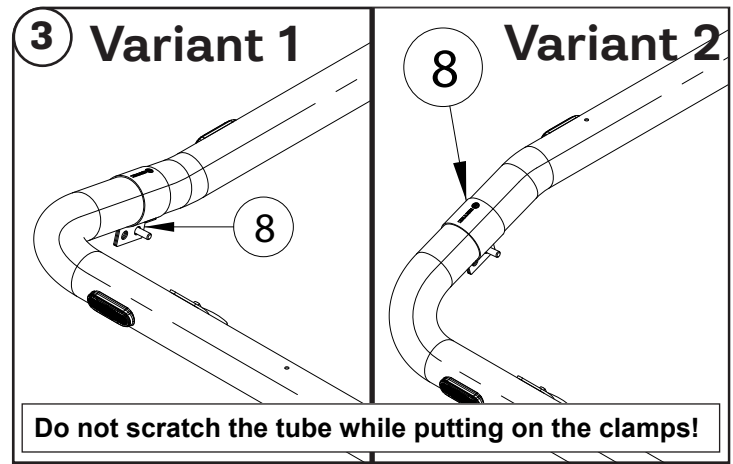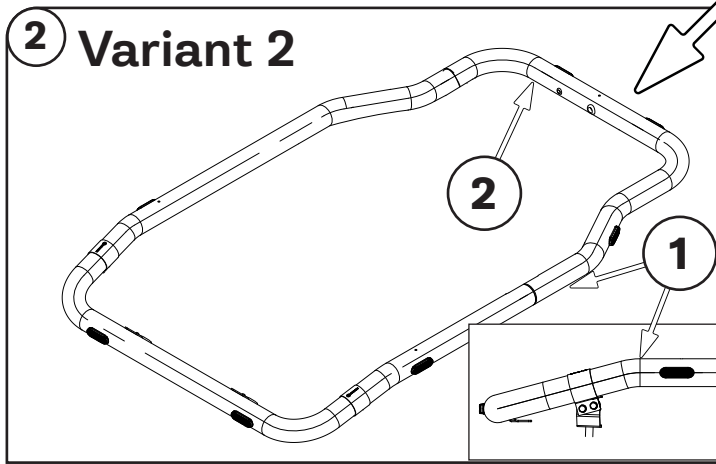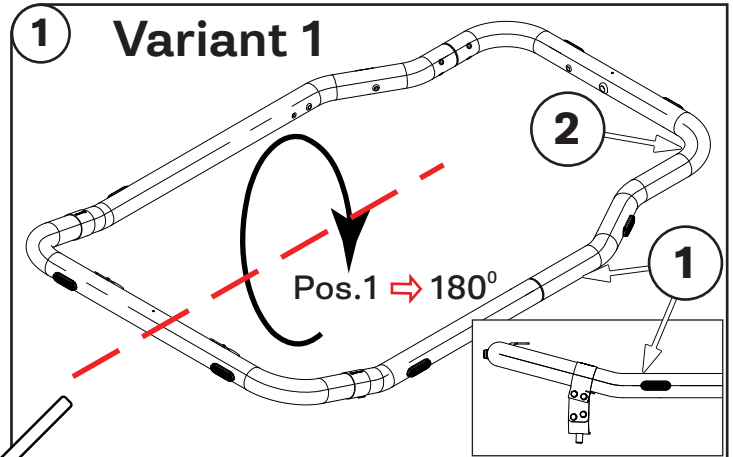

Hitachi ZX135US 21-

Art. 88600170, 88600171

Lamp holder for roof

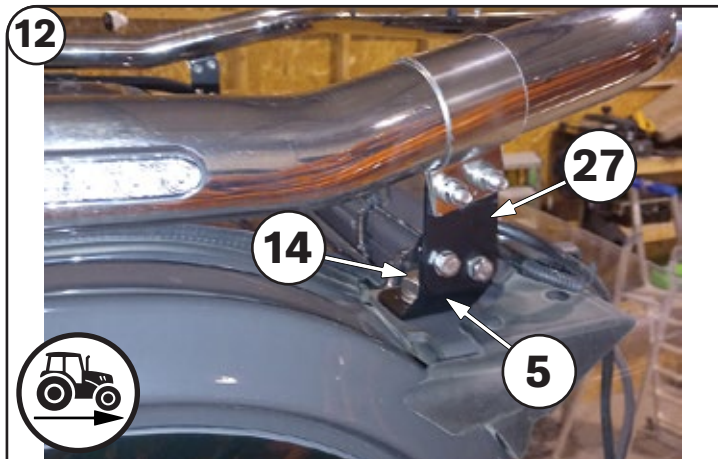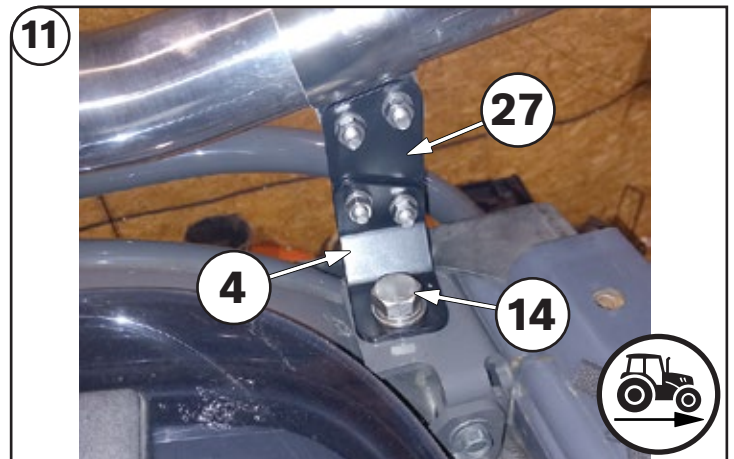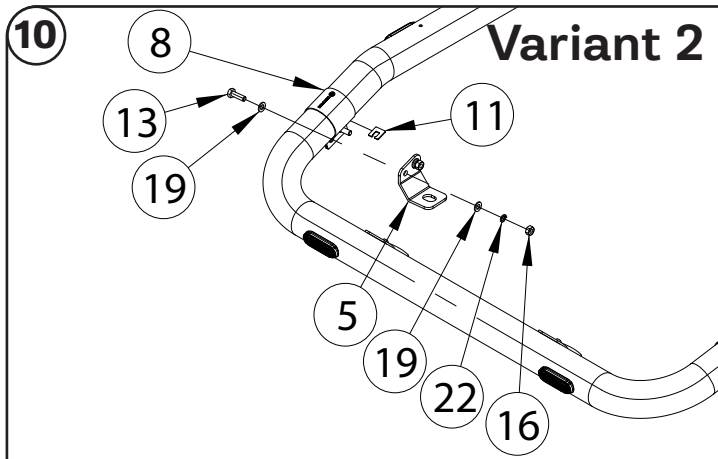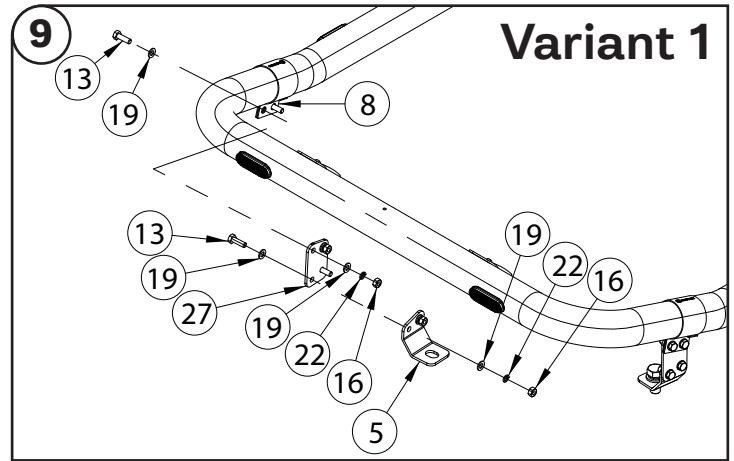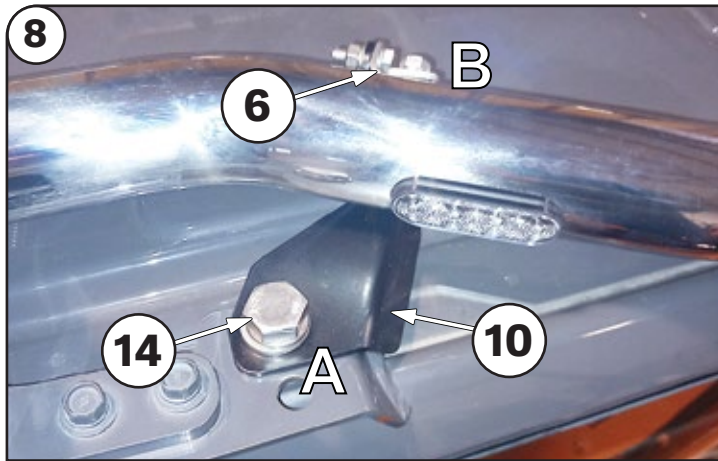

Check and retighten the fasteners:
Road vehicles: every 10 000km
Heavy machinery: every 500 work hours



Clean the product twice a month to remove
dirt, salt, and debris that may cause surface
discoloration or rust spots

In case of any defects or damage to the METEC product upon delivery, contact the reseller or point of sale where you made your purchase for resolution

