

Valtra T

Mounting instructions
Art. 88770072, 88770073
Lamp holder

English




WWW.METEC.EE

Scan the QR code
for translated
instructions or visit
metec.ee/instructions




Weight: 19,5 kg
Time of mounting w/o wiring: 60 min

Required tools:



A2 / A4

M6 - 7 Nm
M8 - 17 Nm

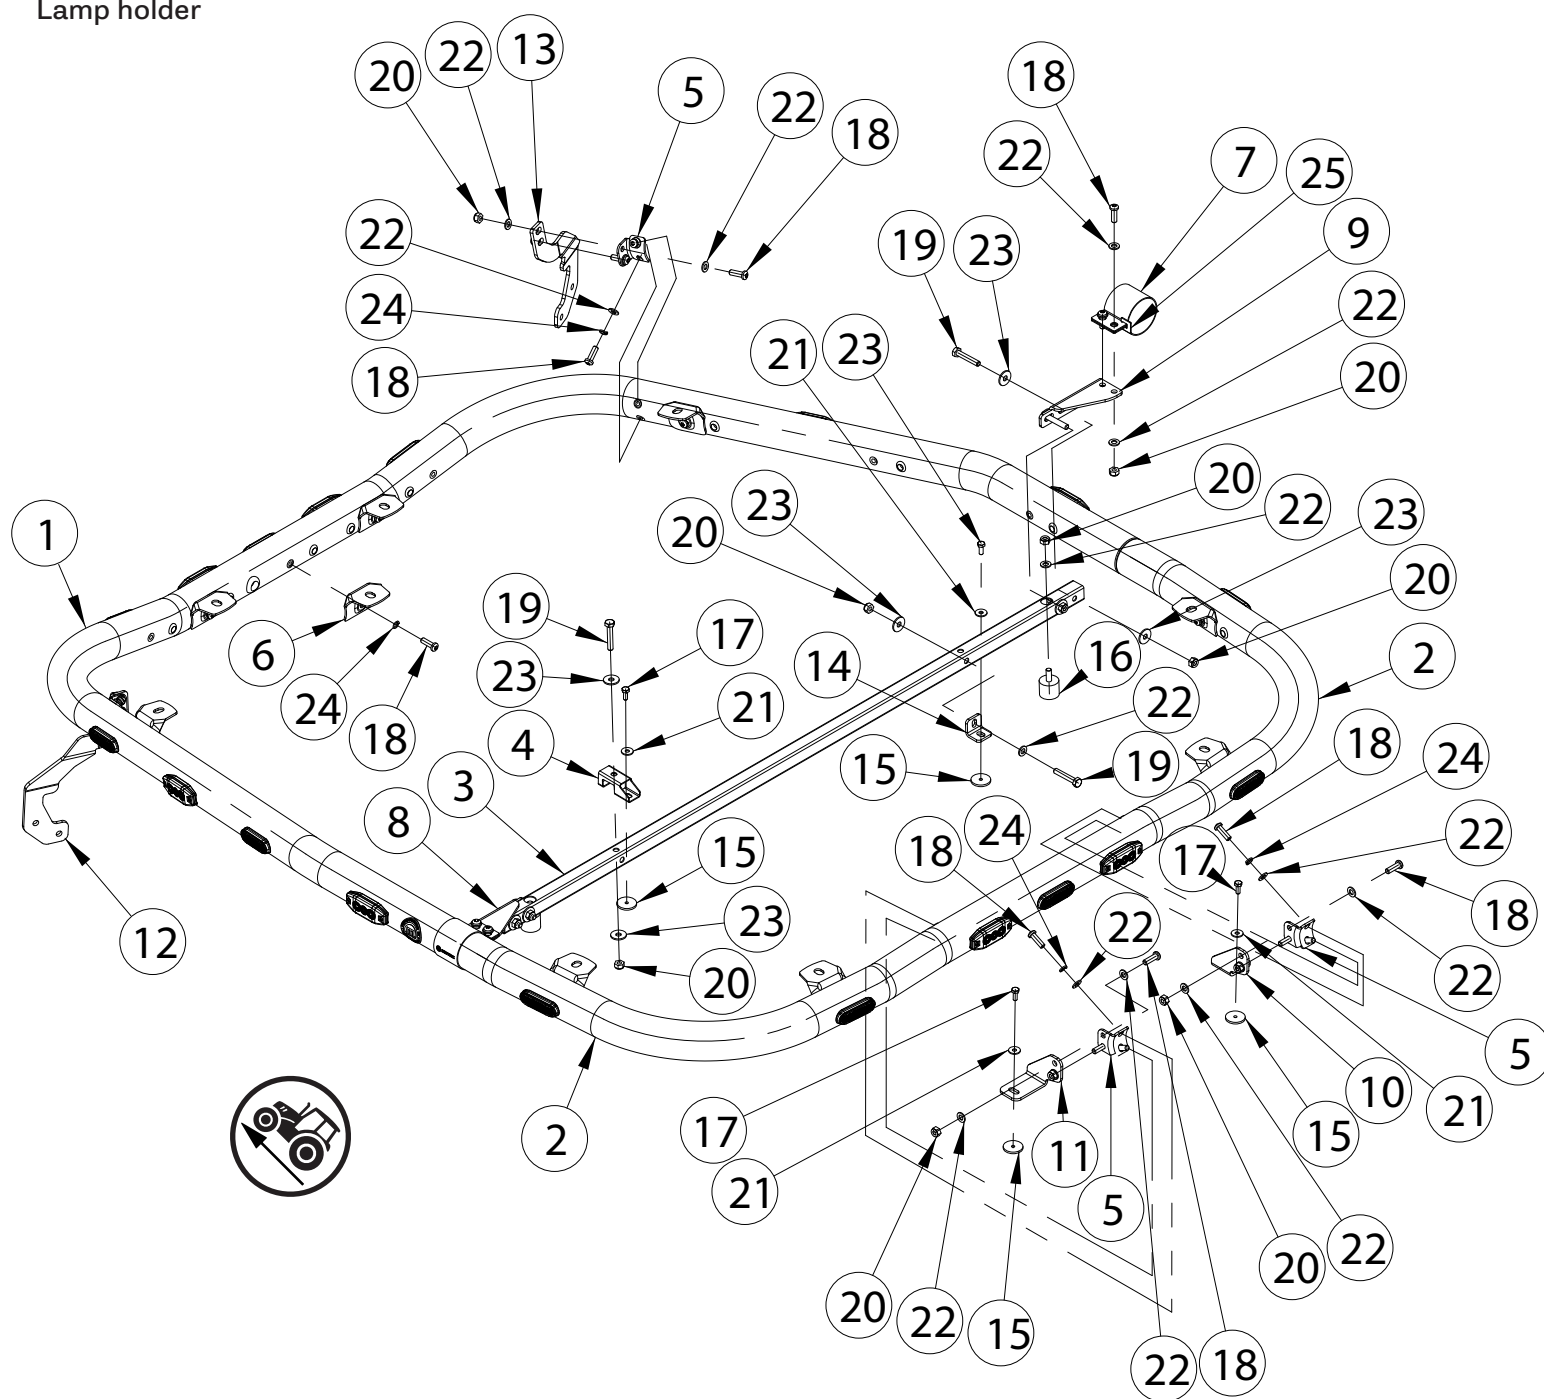

Pos	Description	QTY	Pos	Description	QTY	Pos	Description	QTY
1.	Front tube	1	11.	Angeled plate L=68	1	21.	Flat Washer 6,4x18x1,6	4
2.	Rear tube	1	12.	Bracket	1	22.	Flat Washer 8,4x16x1,6	35
3.	Tube 25x25	1	13.	Bracket	1	23.	Flat Washer 8,4x24x2	11
4.	Tube 25x25	1	14.	Angeled plate	1	24.	Spring washer A8	17
5.	Bolt bracket	4	15.	Rubber washer d=30/5	4	25.	Brace-it installation tool	2
6.	Lamp fixing bracket	9	16.	Compensator 30x25	2			
7.	Clamp	2	17.	Bolt M6x16 DIN933-A2	4			
8.	Angeled plate	1	18.	Bolt M8x25 DIN7380-A2	29			
9.	Angeled plate	1	19.	Bolt M8x45 DIN933-A2	6			
10.	Angeled plate L=49	1	20.	Nut M8 DIN985-A2	20			








NB!










To prevent cold welding, use cold weld grease or engine oil



Installation of the lights must be carried out by a qualified electrician only

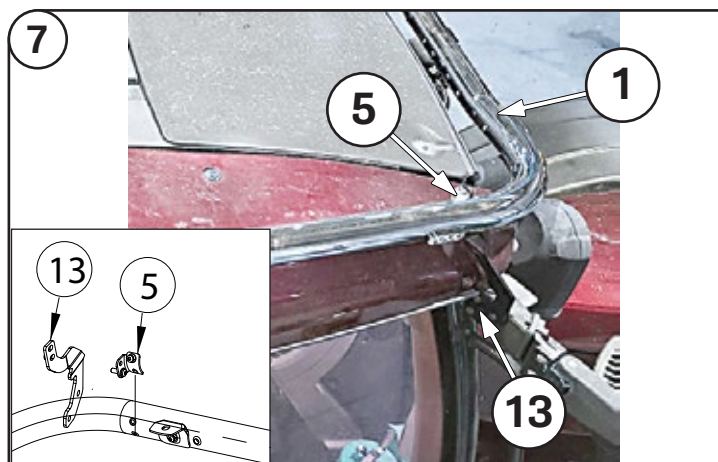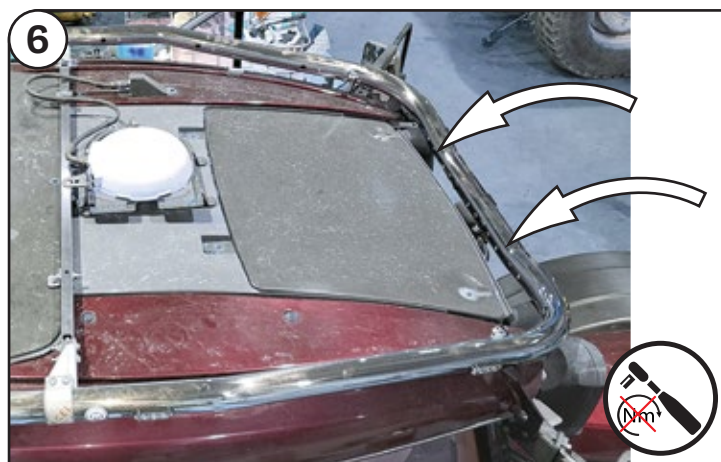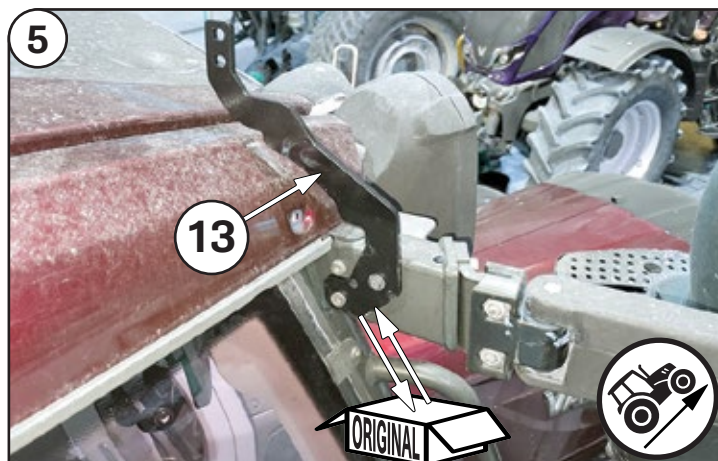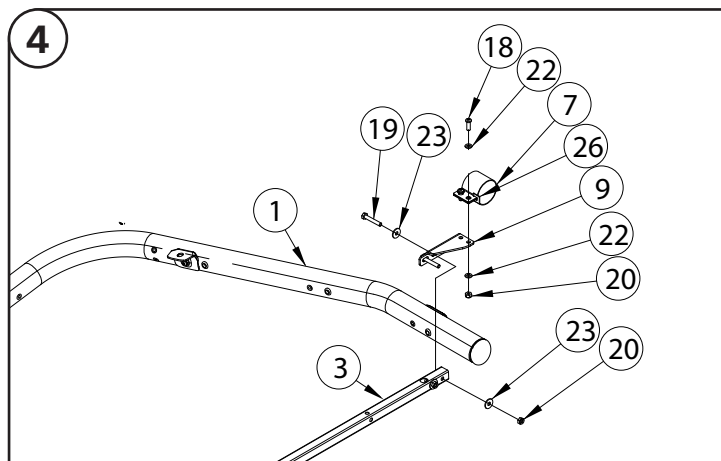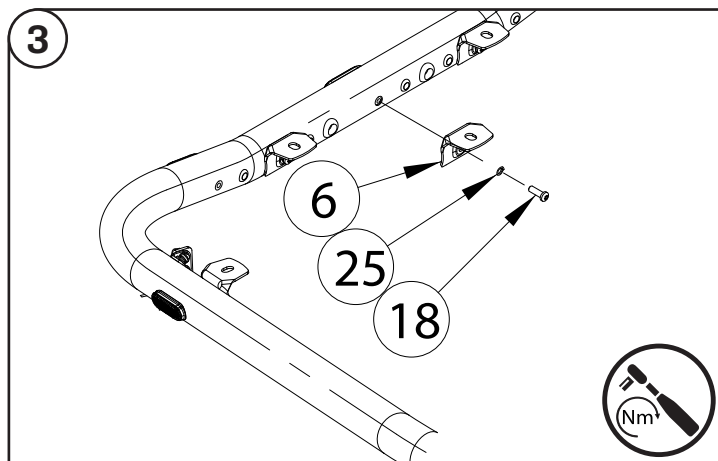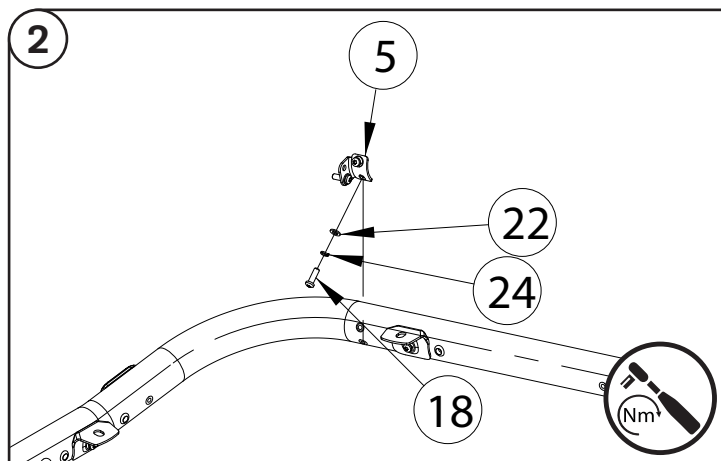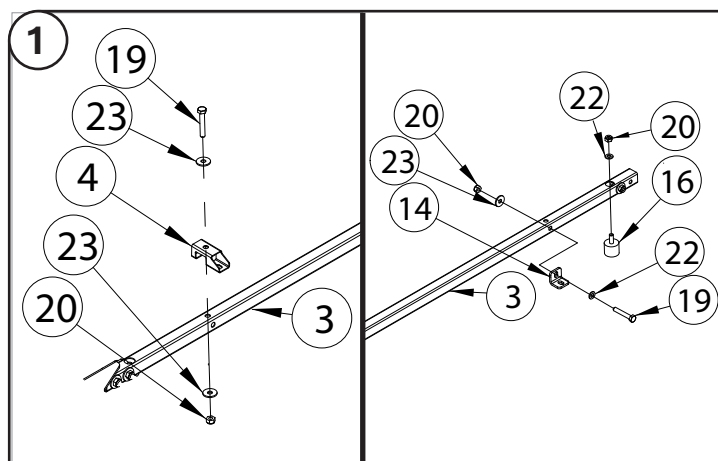

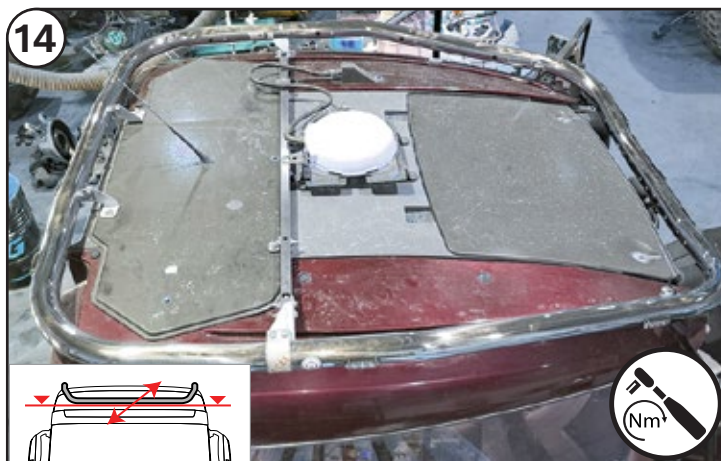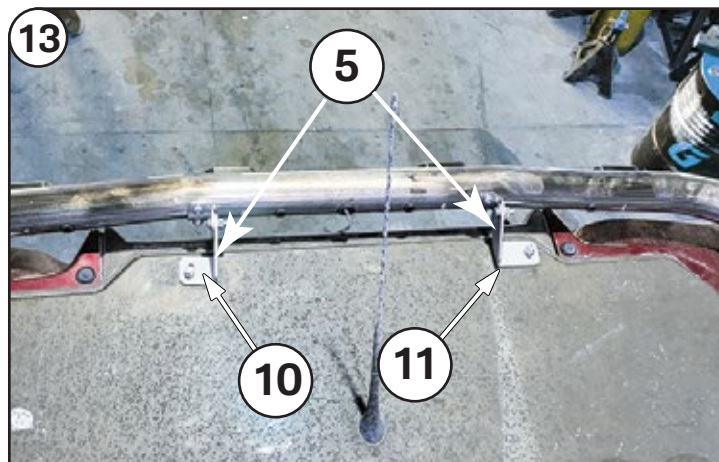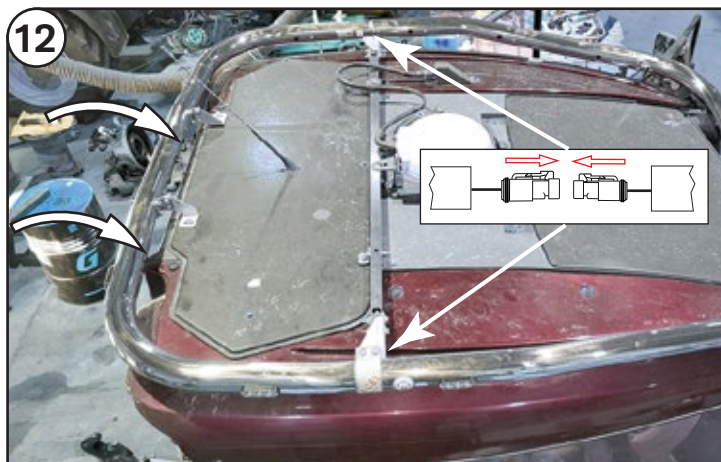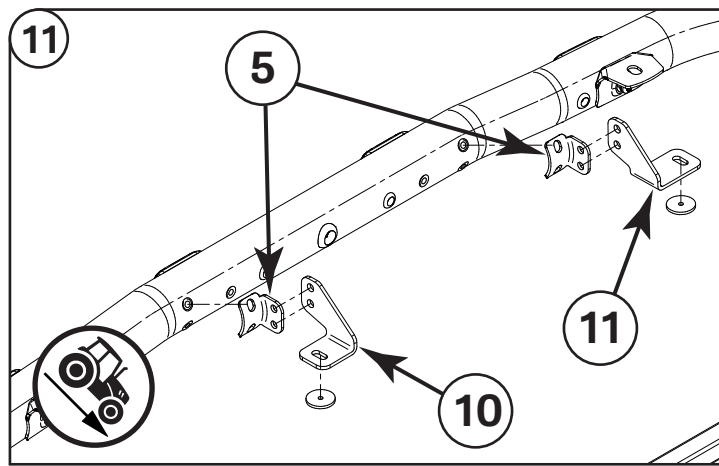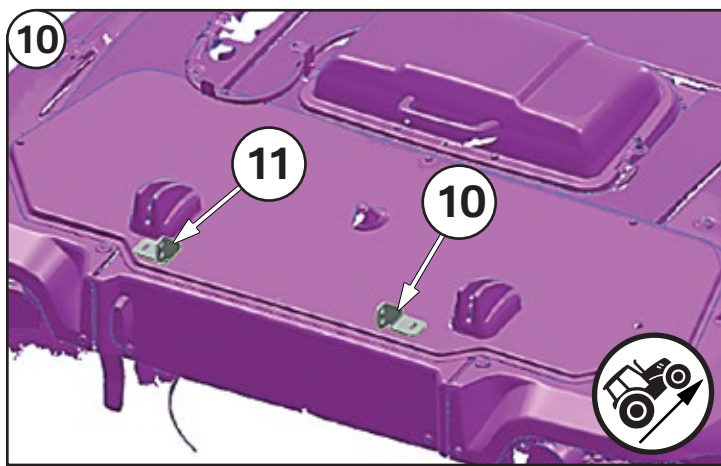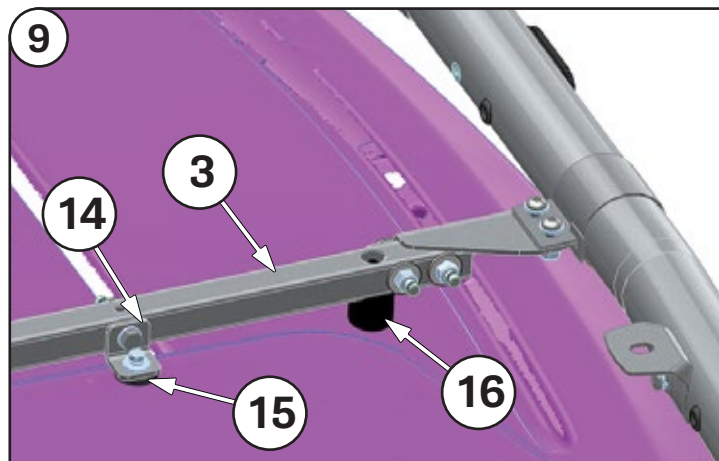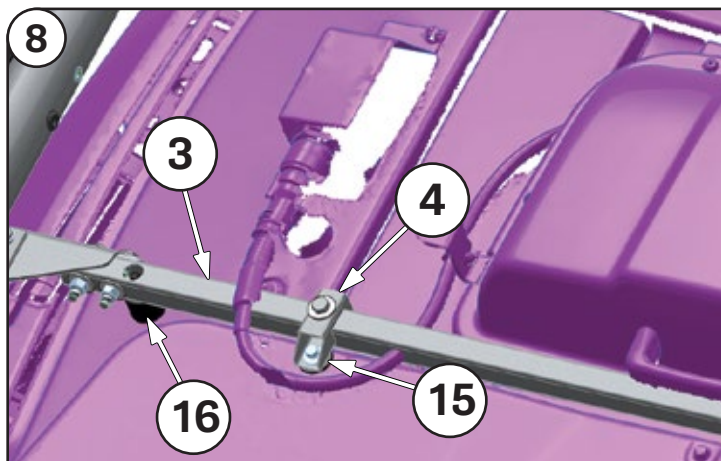

Check and retighten the fasteners after each 10 000km



Clean and wash the product twice a month to prevent corrosion

In case of any defects or damage to the METEC product upon delivery, contact the reseller or point of sale where you made your purchase for resolution


Connecting
flashlights (F)Connecting
marker lights (E)

B

C

Designation and pin cross-reference chart of main lights and marker lights.						
6G1,5	designation	TE282105 (A)	B work 1	C work 2	D work 3	LED marker lights (E)
1	signal / work 1-2 side lights		1	1		
2	signal / work 3 (rear)				1	
3	ground		2	2	2	
4	signal / parking lights	2				1
5	signal / front main	3				
g/y	ground	1				2

Flashlights (F) cord designation

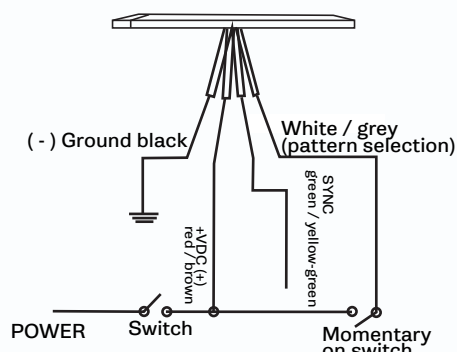

route the B cable through the front tube on both sides

Connecting
flashlights (F)

Conn. front main

Connecting
marker lightsLed markers
E, 12x